



## 29 151 LS0 THERMOSTAT FOR CONCEALED INSTALLATION WITH 2 VALVES

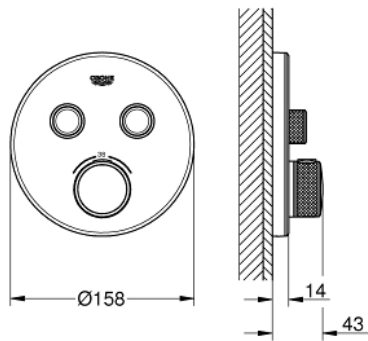


### PRODUCT DESCRIPTION


- set for final installation for
- GROHE Rapido SmartBox 35 600/35 604
- metal wall escutcheon with **GROHE FastFixation** (covered escutcheon and shaft sealing, covered fixing), retroactively 6° adjustable
- **GROHE StarLight** finish
- 
- **GROHE SmartControl** push for ON-OFF, turn for volume adjustment from EcoJoy to full flow
- exchangeable symbols
- **GROHE TurboStat** compact cartridge with wax thermoelement
- GROHE ProGrip with knurl structure
- **GROHE SafeStop** safety button at 38°C  
( calibration required )
- **GROHE SafeStop Plus** optional temperature limiter at 43°C or 46°C included
- built-in non return valve and dirt strainers
- multiple outlets can be run simultaneously
- cover plate in moon white acrylic glass
- **without roughing-in-set**
- flow performance:  
outlet B = 24 l/min  
outlet C = 26 l/min  
outlet B+C = 29 l/min

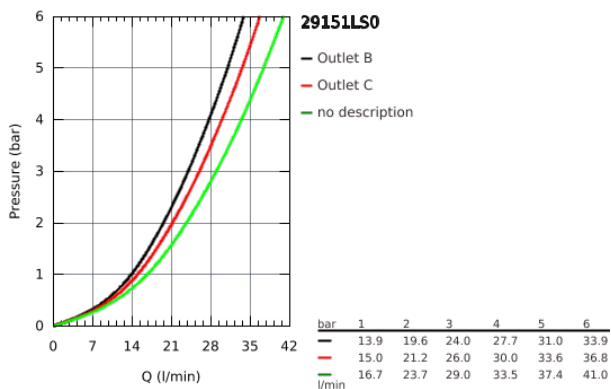

## 29 151 LS0 THERMOSTAT FOR CONCEALED INSTALLATION WITH 2 VALVES

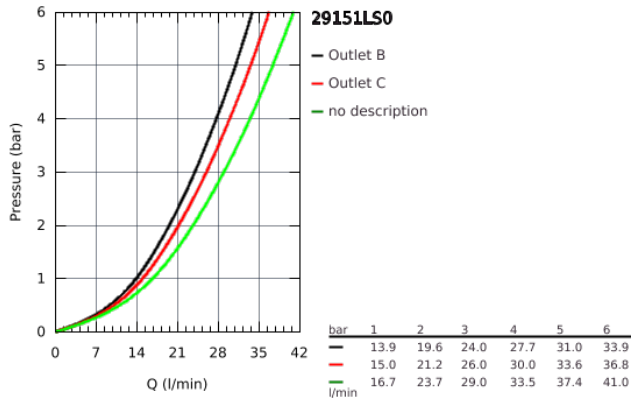

## 29 151 LS0 THERMOSTAT FOR CONCEALED INSTALLATION WITH 2 VALVES

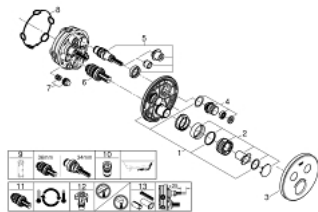

### SPARE PARTS

- 1: Mounting plate (Order-nr. 48363000)
  - 2: Temperature control handle (Order-nr. 49029000)
  - 3: Escutcheon (Order-nr. 49033LS0)
  - 4: WC push button (Order-nr. 48361000)
  - 5: Cartridge (Order-nr. 48359000)
  - 5.1: Spindle (Order-nr. 49088000)
  - 6: Thermostatic compact cartridge 3/4" (Order-nr. 49028000)
  - 7: Non-return valves (Order-nr. 47979000)
  - 8: Sealing washer (Order-nr. 48360000)
  - 9: Socket Spanner (Order-nr. 49059000)\*
  - 10: Backflow protection combination (DIN-EN1717) (Order-nr. 14055000)\*
  - 11: GROHE TurboStat cartridge 3/4" (Order-nr. 49003000)\*
  - 12: Service stops (Order-nr. 1405300M)\*
  - 13: Universal extension set single-lever mixers, 25 mm (Order-nr. 14048000)\*
- \* Optional accessories